


## DATA SHEET

### > Specifications

- Used for safety on bike paths, pedestrian trails and lane choking (amongst others), the standard Steel-Flex marker is made of :
  - One (1) spring steel strip, galvanized and painted in black, polyester powder-coat finish
  - One (1) yellow flexible polyurethane base for on-ground installation, where the steel strip is inserted (preassembled with rivets)
  - One (1) protection polyethylene cap
  - Eight (8) yellow reflective sheeting strips, High Intensity (H.I.) grade, four (4) on each side
- Dimensions :
  - Overall 100 x 165 x 1200 mm (4 x 6.25 x 47.25 in)
  - Reflective sheeting 75 x 75 mm (3 x 3 in)
- Galvanized Steel Anchors  
(see Steel-Flex Installation Guide KOXX-0063)



### > Overview

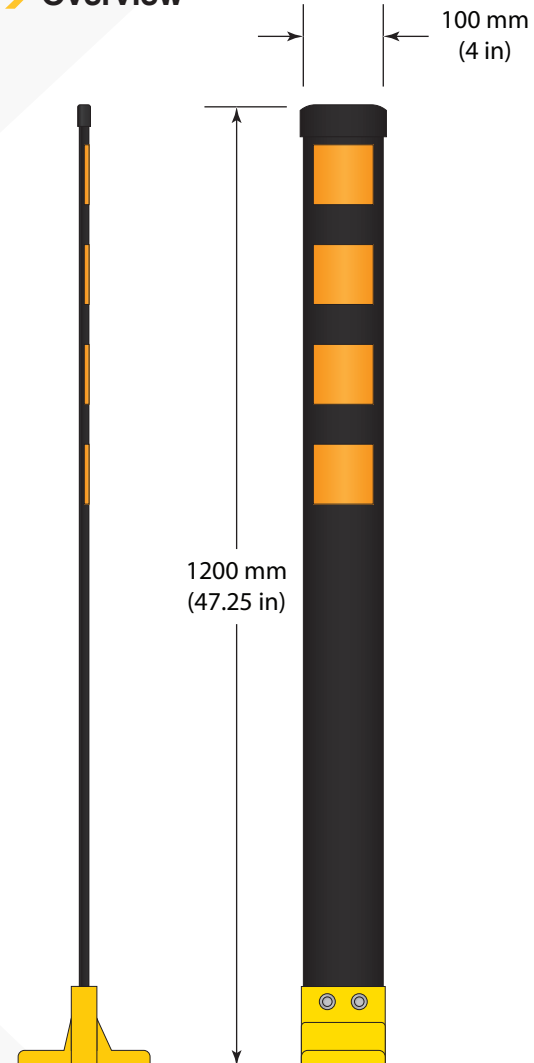

### > Installation

