

Data Sheet


> Specifications

Chicanes comprise two (2) structures placed so as to constrain users to slow down, installed near road and paths intersections


- Welded tubes with polyester powder-coating and H.I. grade reflective sheeting strips
- Removable Locking System with Pin and Padlock
- Standard dimensions (2-arms chicanes) :
Overall 1000 x 1000 mm (39.38 x 39.38 in)
Central post dia. 102 x thick. 5.7 mm (dia. 4 x thick. 7/32 in)
Variable arms length, maximum 900 mm (35.43 in)
- Base dimensions : dia. 203.2 mm (8 in)
with 160 mm (6.3 in) Bolting Circle, 151.6 mm (6 in) High
- Installation on a Welded-plate Ground Anchor (900 mm),
painted Uptek (black) steel, with four (4) 1/2-13 tapped holes
- Optional Cover Plate for protection against winter operations




> Locking System

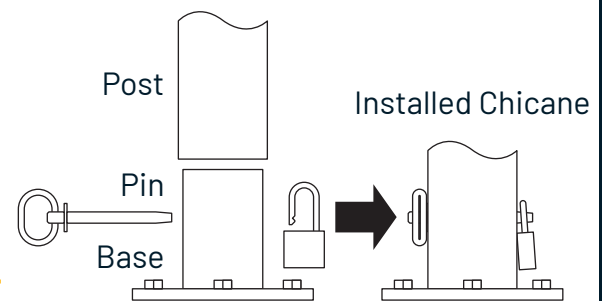

> Overview

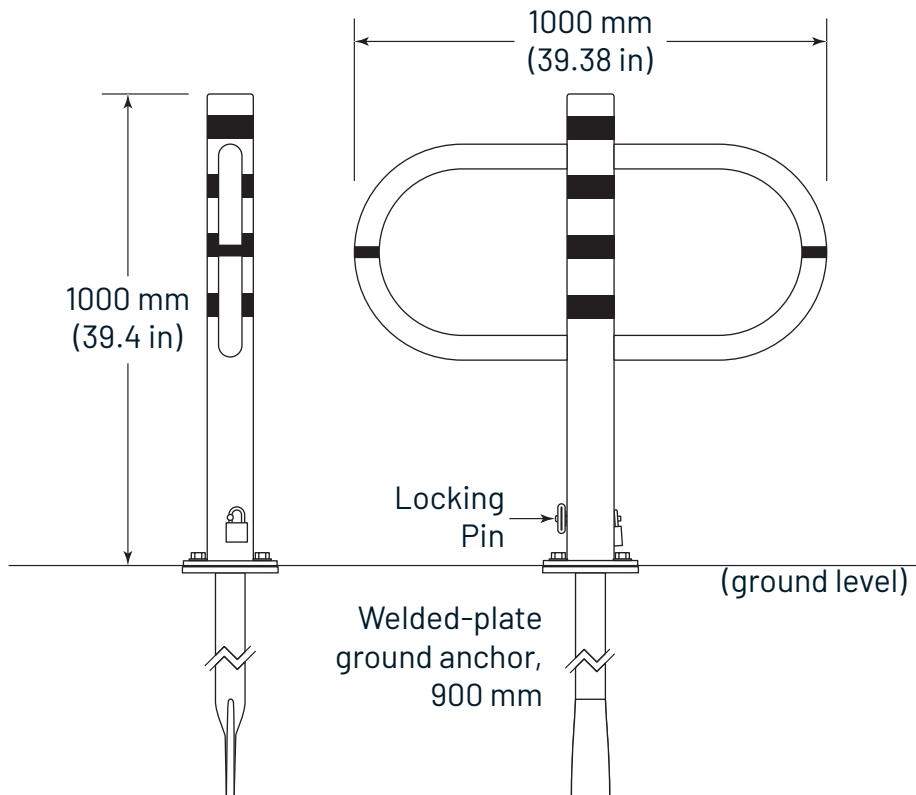


> Cover Plate

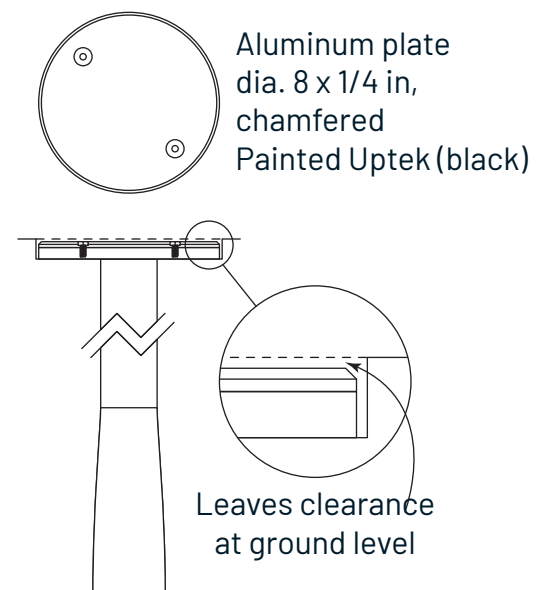

Data Sheet

> Single (1) Arm Variety

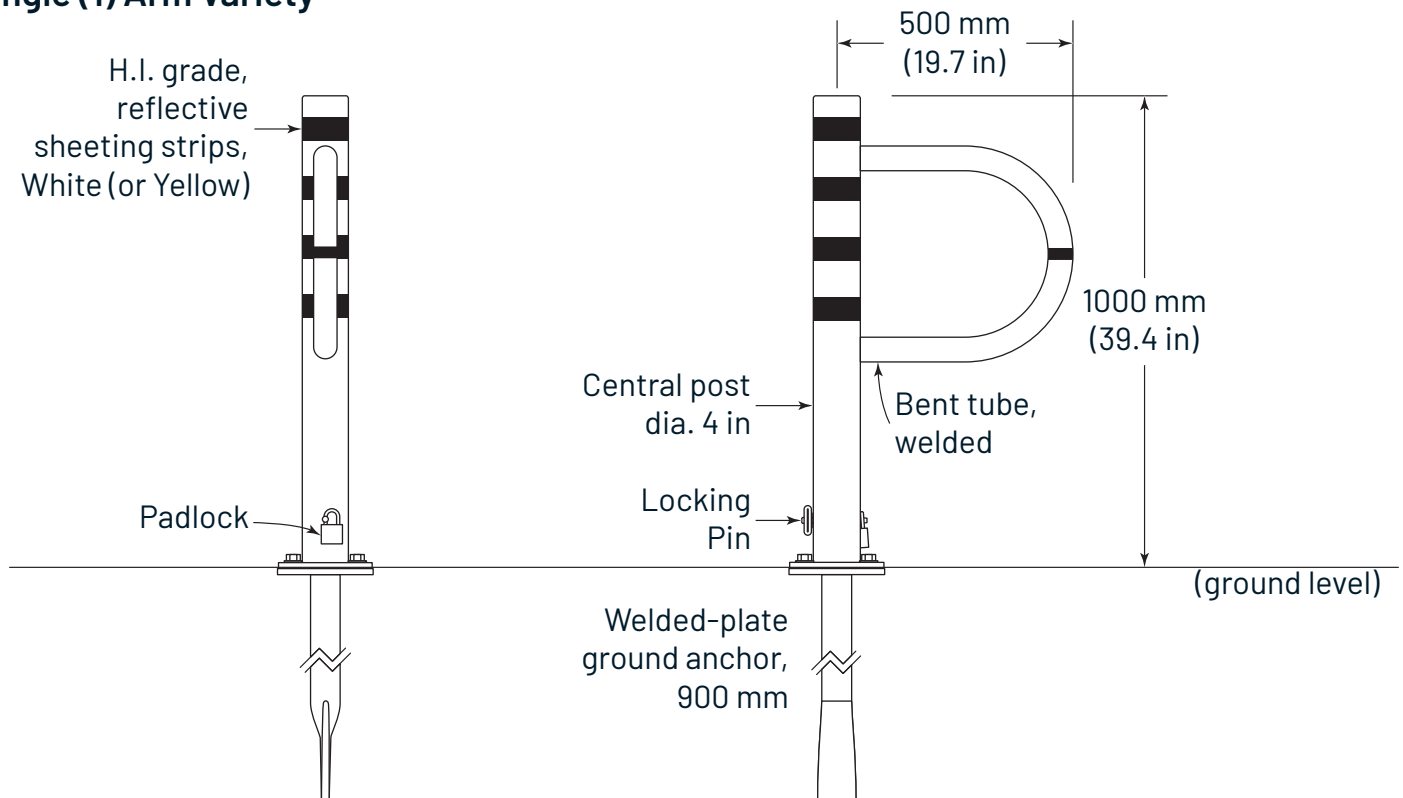

> Double (2) Arms Variety

